


## PNEUMATIC STRAPPING TOOL FOR POLYPROPYLENE AND POLYESTER STRAP WITH VIBRATION SEALING



New cooling welding time indicator

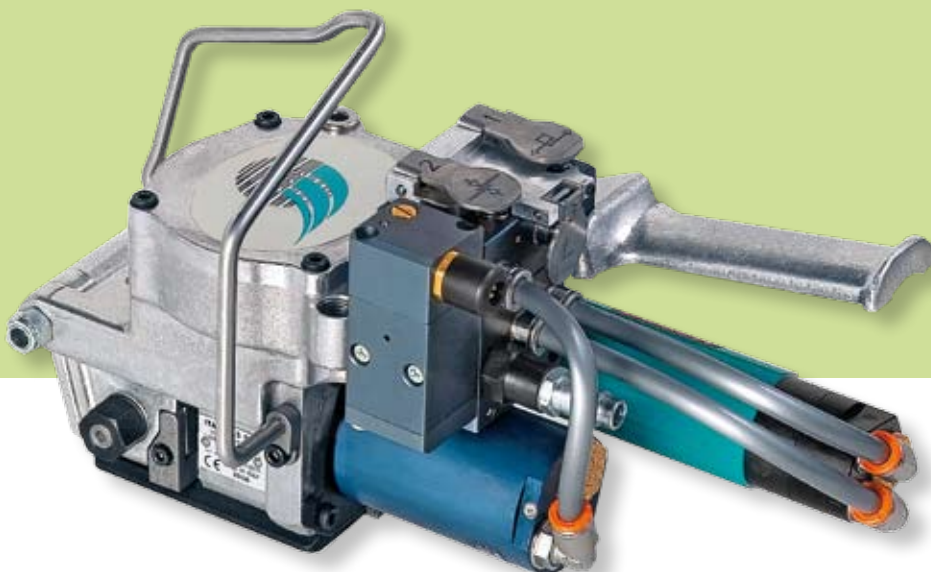

### TECHNICAL SPECIFICATIONS

#### DIMENSIONS

Length	300 mm • 11"
Width	150 mm • 6"
Height	175 mm • 6.9"
Weight	5.1 Kgs • 11.2 lbs

#### FEEDING

Pressure range	4.5 -7 bar / 64-99 psi
Air consumption	14 L/s - 29 cuft/min

#### PERFORMANCE

Max. tension force	3500 N - 6.5 bar - 92 psi
Tensioning speed	9 mt/m
Sealing	Vibration sealing
Joint strength	80% of breaking strength*

Gear ratio -

\* variable according to strap type

### MODEL

CODE	TYPE	STRAP	THICKNESS
T111323	ITA11 / 13mm	PP-PET	0.7-1.4 mm 0.028" - 0.055"
		13 mm • 1/2"	
T119923	ITA11 / 16-19mm	PP-PET	0.7-1.4 mm 0.028" - 0.055"
		16-19 mm • 5/8" - 3/4"	

### POLYESTER STRAP



### POLYESTER STRAP



### POLYPROPYLENE STRAP

